




# Fall 2017 Construction Update

## Ward 1 – Northwest

### Engineering Department

#### **30<sup>th</sup> Street & Jefferson Avenue Culvert Replacement at Closes Creek**

This project includes the replacement of a 66-inch brick storm culvert with a 12 foot by 6 foot concrete culvert on 30<sup>th</sup> Street just south of Jefferson Avenue at Closes Creek and also includes the extension of 36-inch arch reinforced concrete culvert adjacent to 3019 Jefferson Avenue. This project is substantially complete.

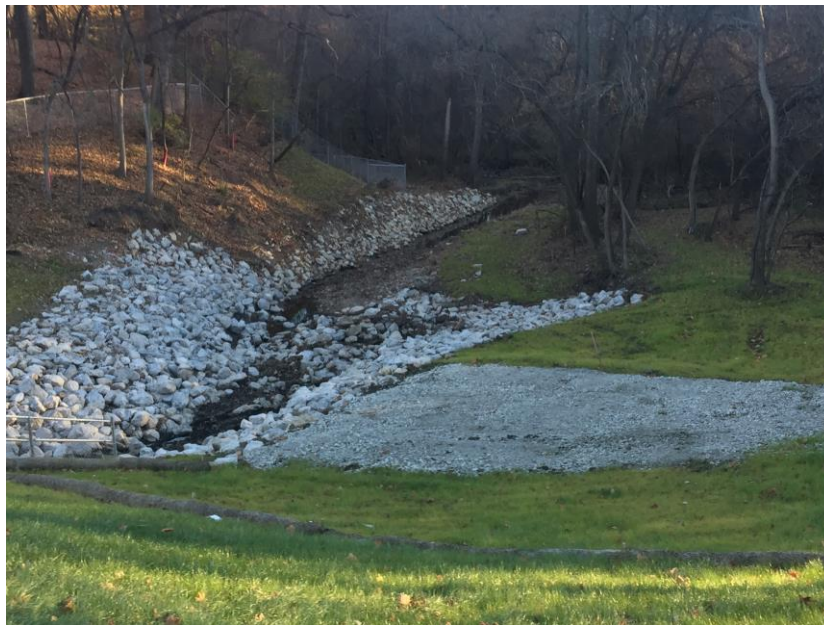

#### **2018 Sewer Lining Program**

This project provides for the lining of deteriorated sanitary sewers throughout the city. The installation of the liner restores the structural integrity of the pipe to prevent failures and also reduce groundwater infiltration into the sanitary sewer system. Project construction will begin early in 2018. The work will continue through the winter.

The following sewers are planned for Ward 1:

<u>Street</u>	<u>From</u>	<u>To</u>
6301 Sherrick Avenue	W. End of Sherrick Avenue	Urbandale Avenue
Valdez Drive	E. End of Valdez Drive	400' West
Bennett Avenue	MLK Jr. Pkwy.	27 <sup>th</sup> Place
Hickman Road	Prospect Road	Nash Drive
Franklin Avenue	2 <sup>nd</sup> Avenue	9 <sup>th</sup> Street
Washington Avenue	7 <sup>th</sup> Street	9 <sup>th</sup> Street
7 <sup>th</sup> Street	College Avenue	Washington Avenue
College Avenue	Arlington Avenue	7 <sup>th</sup> Street

## 30th Street Sidewalk from Boston Avenue to Urbandale Avenue


The 30<sup>th</sup> Street Sidewalk from Boston Avenue to Urbandale Avenue was awarded to Cerebral Group for \$183,200. This project added a sidewalk along 30<sup>th</sup> Street from Boston Avenue to Urbandale Avenue with a connection to the Inter-Urban Trail north of Urbandale Avenue. The project included grading, retaining wall, PCC sidewalk, and chain link fence. Construction was completed in November.



## 2017 HMA Residential Paving Program

This project provided for the reconstruction of residential streets utilizing removal of the deteriorated existing pavement and replacing it with a new hot mix asphalt pavement. The project also included constructing ADA compliant sidewalk curb ramps within the project areas. The contract was awarded to Grimes Asphalt & Paving Corporation, and completed for \$613,034.62. The following streets located in Ward 1 were reconstructed:

<u>Street</u>	<u>From</u>	<u>To</u>
38 <sup>th</sup> Street	Douglas Avenue	Madison Avenue
45 <sup>th</sup> Street	Beaver Crest Drive at Douglas Avenue	New York Avenue
50 <sup>th</sup> Street	Sheridan Avenue	New York Avenue
59 <sup>th</sup> Street	New York Avenue	Urbandale Avenue
62 <sup>nd</sup> Street	Dead End East of 27 <sup>th</sup> Street	Dead End West of 27 <sup>th</sup> Street
Allison Avenue	Merle Hay Road	62 <sup>nd</sup> Street
College Avenue	30 <sup>th</sup> Street	33 <sup>rd</sup> Street
Holcomb Avenue	61 <sup>st</sup> Street	62 <sup>nd</sup> Street
New York Avenue		

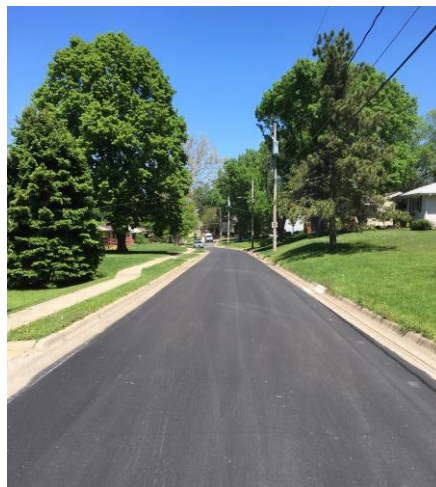

## 2017-2018 HMA Pavement Scarification and Resurfacing Program

This project provides for maintenance of residential and arterial streets utilizing surface scarification and hot mix asphalt overlay to improve the surface condition and to extend the useful service life of the streets. The contract was awarded to Des Moines Asphalt & Paving at a contract amount of \$897,881.45. Work on this citywide project began in July, and is scheduled to be completed by June 30, 2018. The following streets located in Ward 1 have been resurfaced:

<u>Street</u>	<u>From</u>	<u>To</u>
3 <sup>rd</sup> Street	University Avenue	Creighton Avenue
5 <sup>th</sup> Avenue	Orchard Avenue	College Avenue
8 <sup>th</sup> Street	Franklin Avenue	Lincoln Avenue
36 <sup>th</sup> Street	Urbandale Avenue	Adams Avenue
Arlington Avenue	College Avenue	Franklin Avenue
Franklin Avenue	34 <sup>th</sup> Street	Dead End East
Lincoln Avenue	8 <sup>th</sup> Street	9 <sup>th</sup> Street
Washington Avenue	7 <sup>th</sup> Street	9 <sup>th</sup> Street
Urbandale Avenue	57 <sup>th</sup> Street	Merle Hay Road

The following street located in Ward 1 is scheduled to be resurfaced in 2018:

<u>Street</u>	<u>From</u>	<u>To</u>
Lower Beaver Avenue	Valdez Drive	Twana Drive

## 2017-2018 Expanded Street Resurfacing Program - Contract 1

This project provides for maintenance of residential and arterial streets utilizing surface scarification and hot mix asphalt overlay to improve the surface condition and to extend the useful service life of the streets. The contract was awarded to Des Moines Asphalt & Paving at an estimated cost of \$1,583,934.65. Work on this contract began in mid-June and the asphalt work was completed this fall. Sidewalk ramps will be constructed next spring to complete this project. The following streets located in Ward 1 were resurfaced this year:

<u>Street</u>	<u>From</u>	<u>To</u>
55th Street	University Avenue	Franklin Avenue
55th Street	Franklin Avenue	Hickman Road
Douglas Avenue	Merle Hay Road	62nd Street
Forest Ave	16th Street	18th Street
43 <sup>rd</sup> Street	Madison Ave	Shawnee Ave
Crestwood Road	Manor Lane	36th Place
Rose Hedge Drive	36th Place	Aurora Ave
36th Place	Rose Hedge Drive	Marianna Trail
Ardmore Street	36th Place	Aurora Ave

